

ОБЪЕКТНО- ОРИЕНТИРОВАННОЕ ПРОГРАММИРОВАНИЕ

Лекция № 1 / 03
25.02.2019 г.



MEMBER INITIALIZER LIST

```
//complex.h
class Complex{
    double re, im;
public:
    Complex();
    Complex(double re, double im);
    ...
};
```

```
//complex.cpp
Complex::Complex(){
    re = 0.;
    im = 0.;
}
```

```
Complex::Complex(double re, double im){
    this->re = re;
    this->im = im;
}
```

copy initialization

MEMBER INITIALIZER LIST

```
//complex.h
class Complex{
    double re, im;
public:
    Complex();
    Complex(double re, double im);
    ...
};
```

initializer list

```
//complex.cpp
Complex::Complex() : re(0.), im(0.){
}

Complex::Complex(double re, double im)
    : re(re), im(im) {
}
```



direct initialization

MEMBER INITIALIZER LIST

```
//complex.h
class Complex{
    double re, im;
public:
    Complex();
    Complex(double re, double im);
    ...
};
```

initializer list

```
//complex.cpp
Complex::Complex() : re{ 0. }, im{ 0. }{
}

Complex::Complex(double re, double im)
    : re{ re }, im{ im } {
}
```

uniform initialization
(since C++11)

DELEGATING CONSTRUCTOR

```
//complex.h
class Complex{
    double re, im;
public:
    Complex();
    Complex(double re, double im);
    ...
};
```

initializer list

```
//complex.cpp
Complex::Complex() : Complex(0., 0.){
}

Complex::Complex(double re, double im)
    : re{ re }, im{ im } {
}
```

Complex() delegates to
Complex(double, double)

MEMBER INITIALIZER LIST

```
//complex.cpp
```

```
Complex::Complex() : im(0.), re(im) {  
}
```

```
    re = ???;
```

```
    im = ???;
```


MEMBER INITIALIZER LIST

```
//complex.cpp
```

```
Complex::Complex() : im(0.), re(im) {  
}
```

```
re = -9.25596e+61;
```

```
im = 0;
```

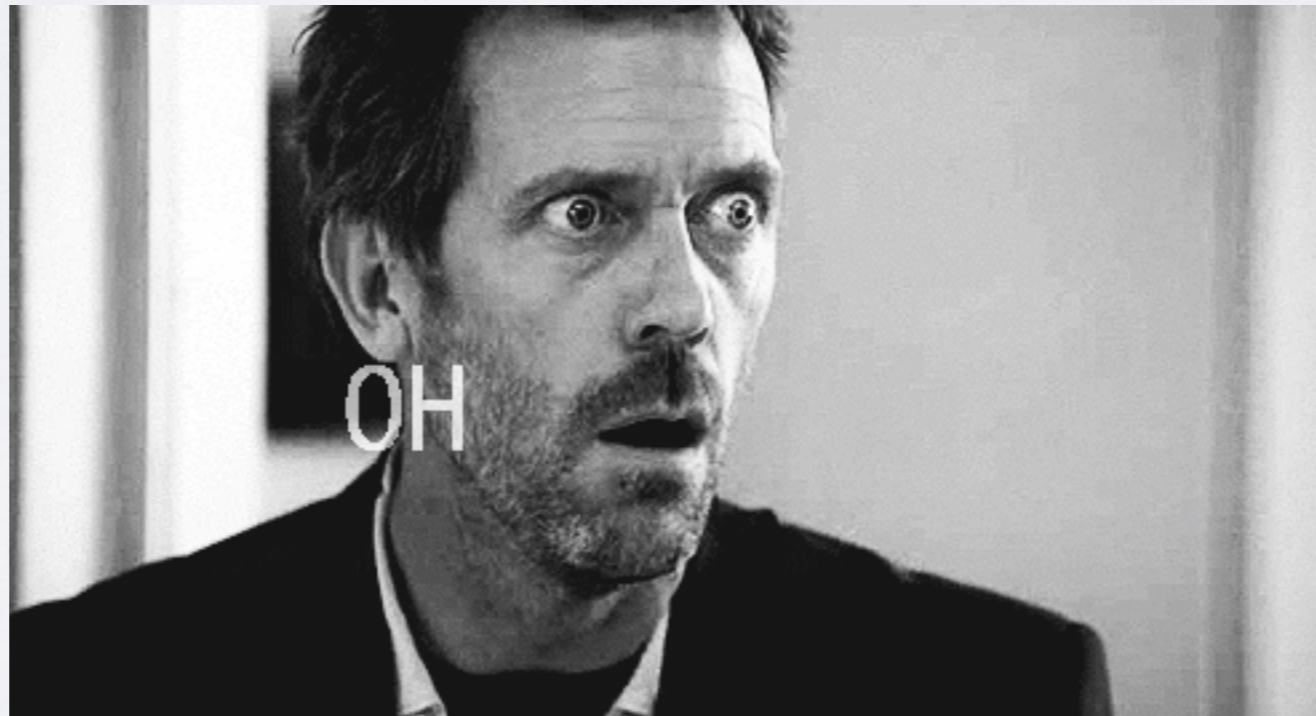

INITIALIZATION ORDER

1. Инициализация виртуальных базовых классов.
2. Инициализация прямых базовых классов.

3. Инициализация нестатических полей в порядке их объявления в классе.
4. Выполнение тела конструктора.

REFERENCE

//reference declaration


Type& nameRef = some_object;

const Type& nameRef = some_object;

**Ссылка - это псевдоним уже существующего объекта
(альтернативное имя объекта).**

REFERENCE

```
int a = 2;  
int &a_ref = a;  
int *a_ptr = &a;
```

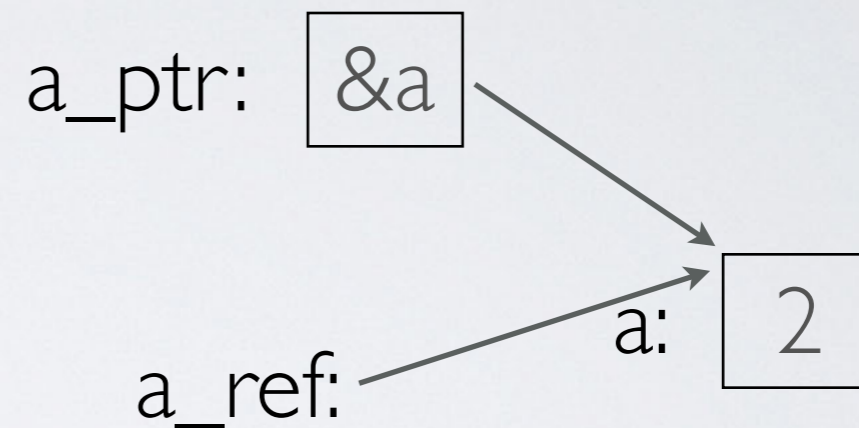


```
a_ref = 3;  
printf("%d\n", a); // 3
```

Ссылку можно воспринимать как константный указатель, который разыменуетя (неявно) при использовании.


REFERENCE

```
void swap(int p, int q) {  
    int r = p;  
    p = q;  
    q = r;  
}
```




Idiot-style

```
void swap(int *p, int *q) {  
    int r = *p;  
    *p = *q;  
    *q = r;  
}
```



C-style

```
void swap(int &p, int &q) {  
    int r = p;  
    p = q;  
    q = r;  
}
```



C++-style

REFERENCE

```
//stack.h
class Stack{
    size_t size;
    /*...*/
public:
    Stack();
    ~Stack();

    void clear();
    void push(int node);
    void pop();

    int& top();
    const int& top() const;

    ...
};
```

REFERENCE

```
int& ref;           //error: ссылка должна быть
                   //      проинициализирована

int& *ref;         //error: нельзя создать указатель
                   //      на ссылку.

int& &ref;         //error: нельзя создать ссылку
                   //      на ссылку.

int& ref = 1;     //error: нельзя создать не константную
                   //      lvalue-ссылку на временный объект.

int a;
int* &ref = &a;   //ok: ссылка на указатель


const int& ref = 1; //ok: константная ссылка
                   //      на временный объект.
```

REFERENCE **VS** POINTER

1. Нельзя иметь пустые (NULL) ссылки. Указатели можно.
2. Нельзя переинициализировать ссылку. Указатели могут указывать на другие объекты.
3. Ссылка обязательно должна быть инициализирована.

COMPOSITION

```
class Base{  
    int baseInt;  
    char baseChar;  
};  
  
class Composed{  
    Base base;  
    char composedChar;  
    int composedInt;  
};
```

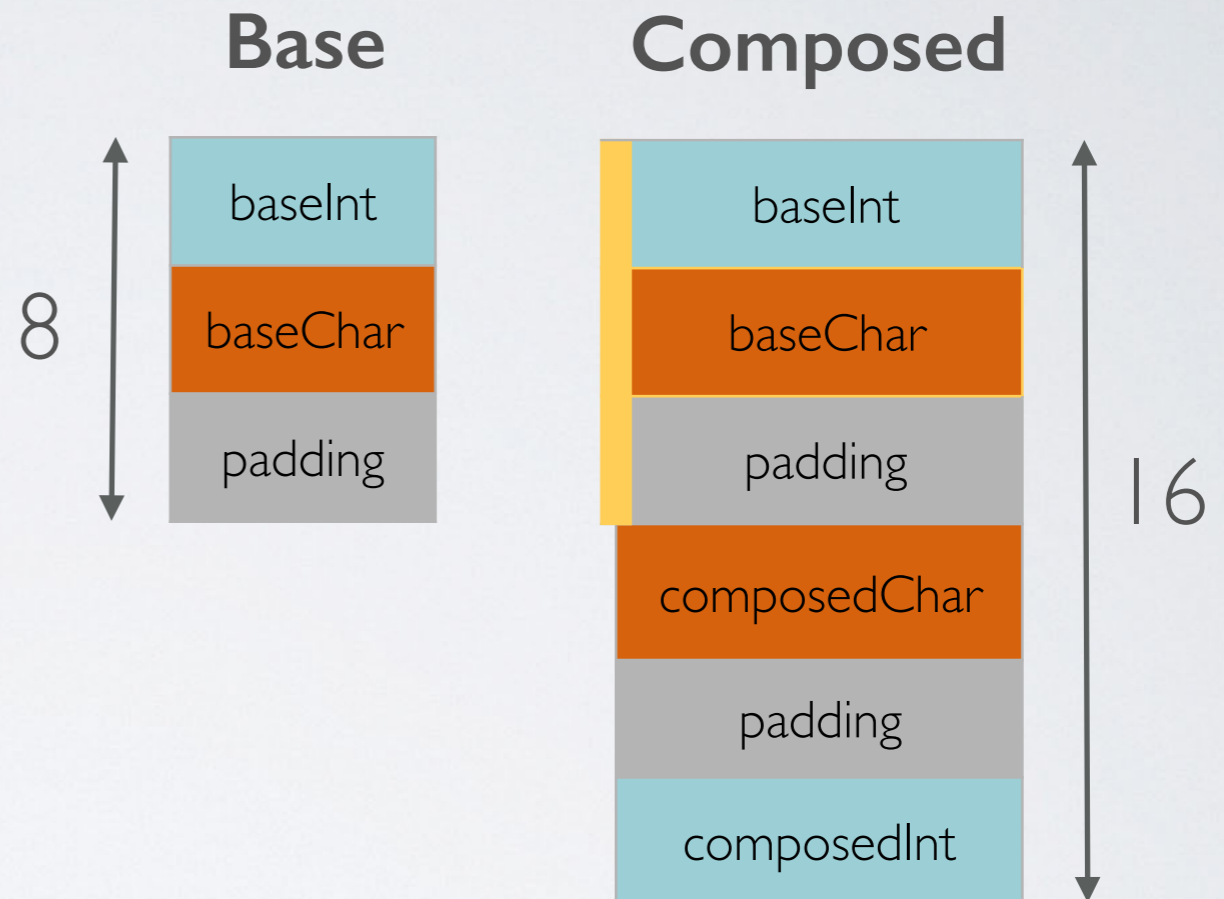


INHERITANCE

```
class Base{  
    int baseInt;  
    char baseChar;  
};
```

```
class Composed{  
    Base base;  
    char composedChar;  
    int composedInt;  
};
```

```
class Derived: public Base{  
    char derivedChar;  
    int derivedInt;  
};
```

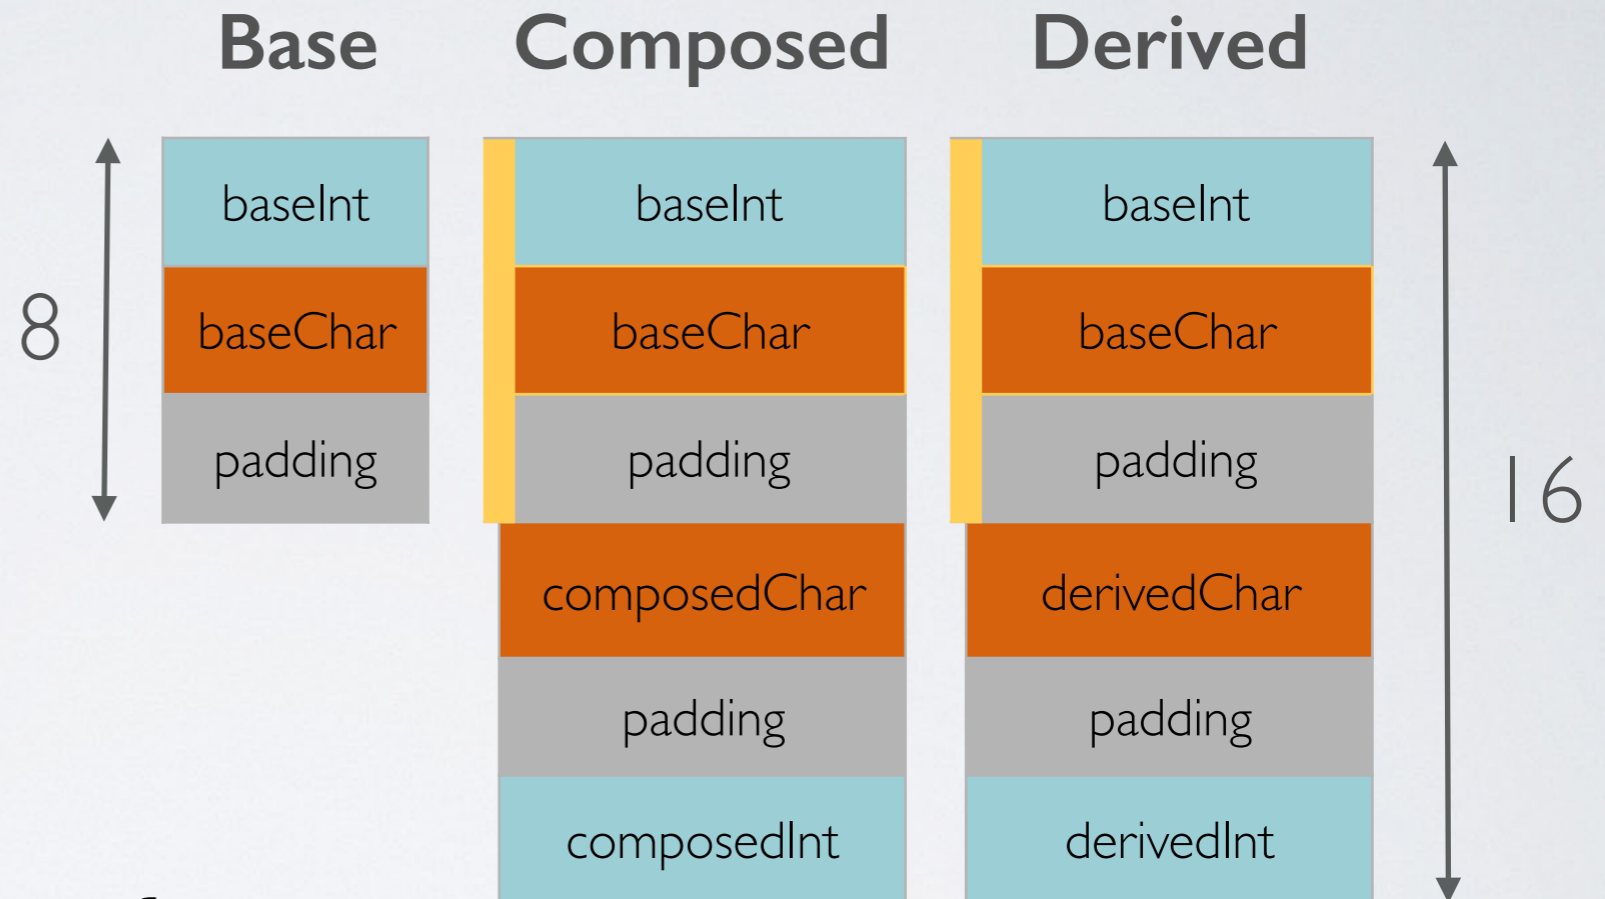


MSVC compiler

INHERITANCE

```
class Base{  
    int baseInt;  
    char baseChar;  
};
```


```
class Composed{  
    Base base;  
    char composedChar;  
    int composedInt;  
};
```

```
class Derived: public Base{  
    char derivedChar;  
    int derivedInt;  
};
```

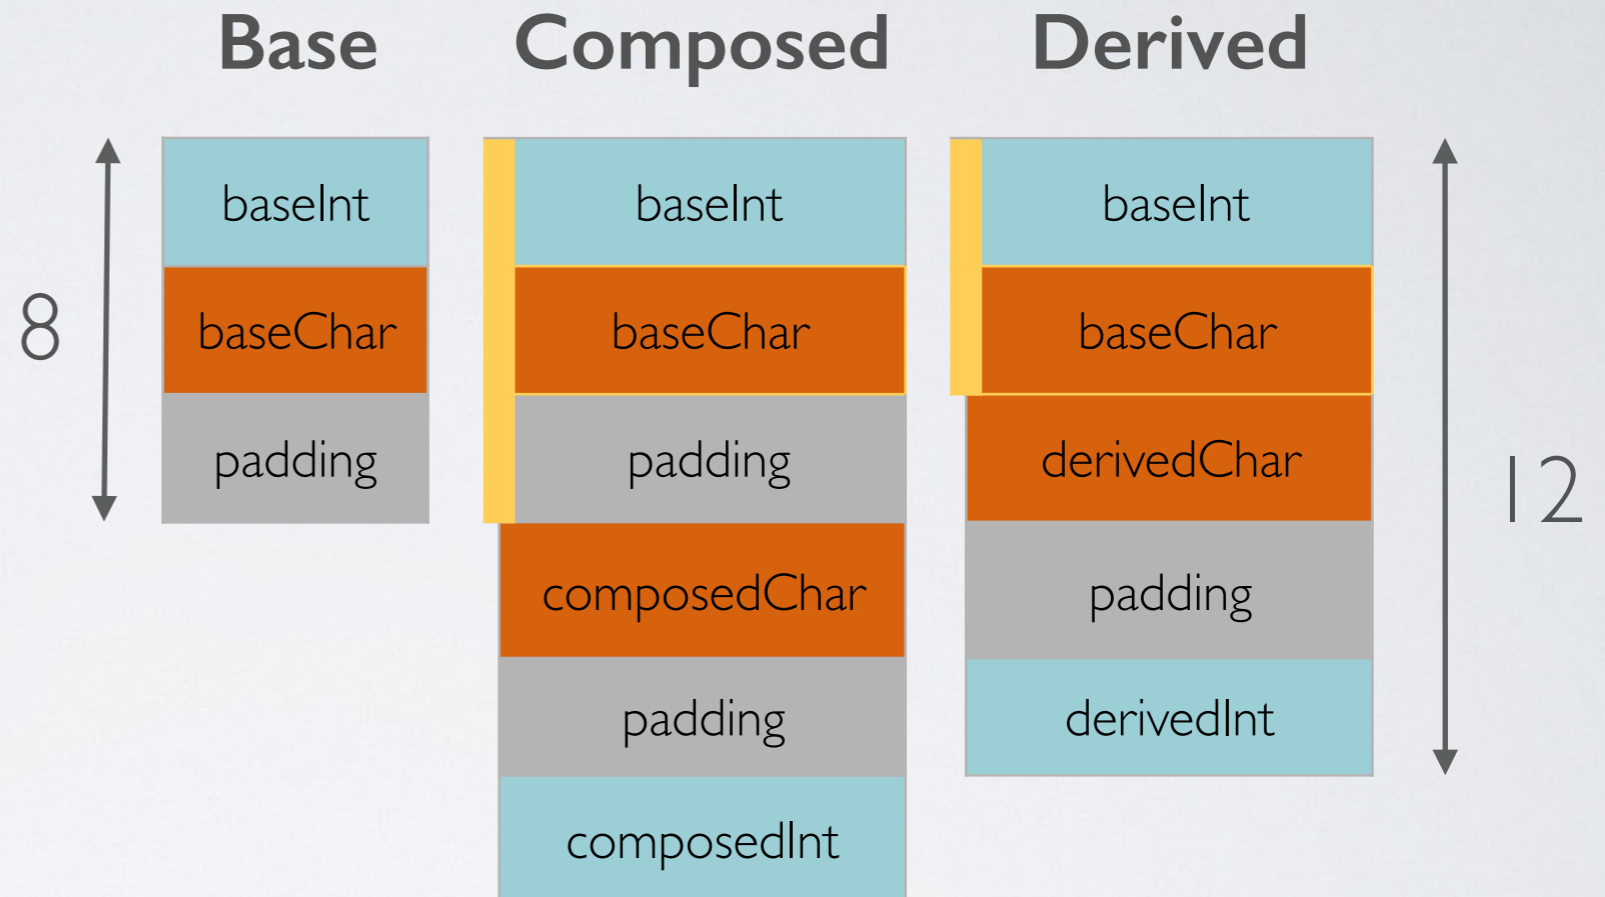

Clang compiler

INHERITANCE

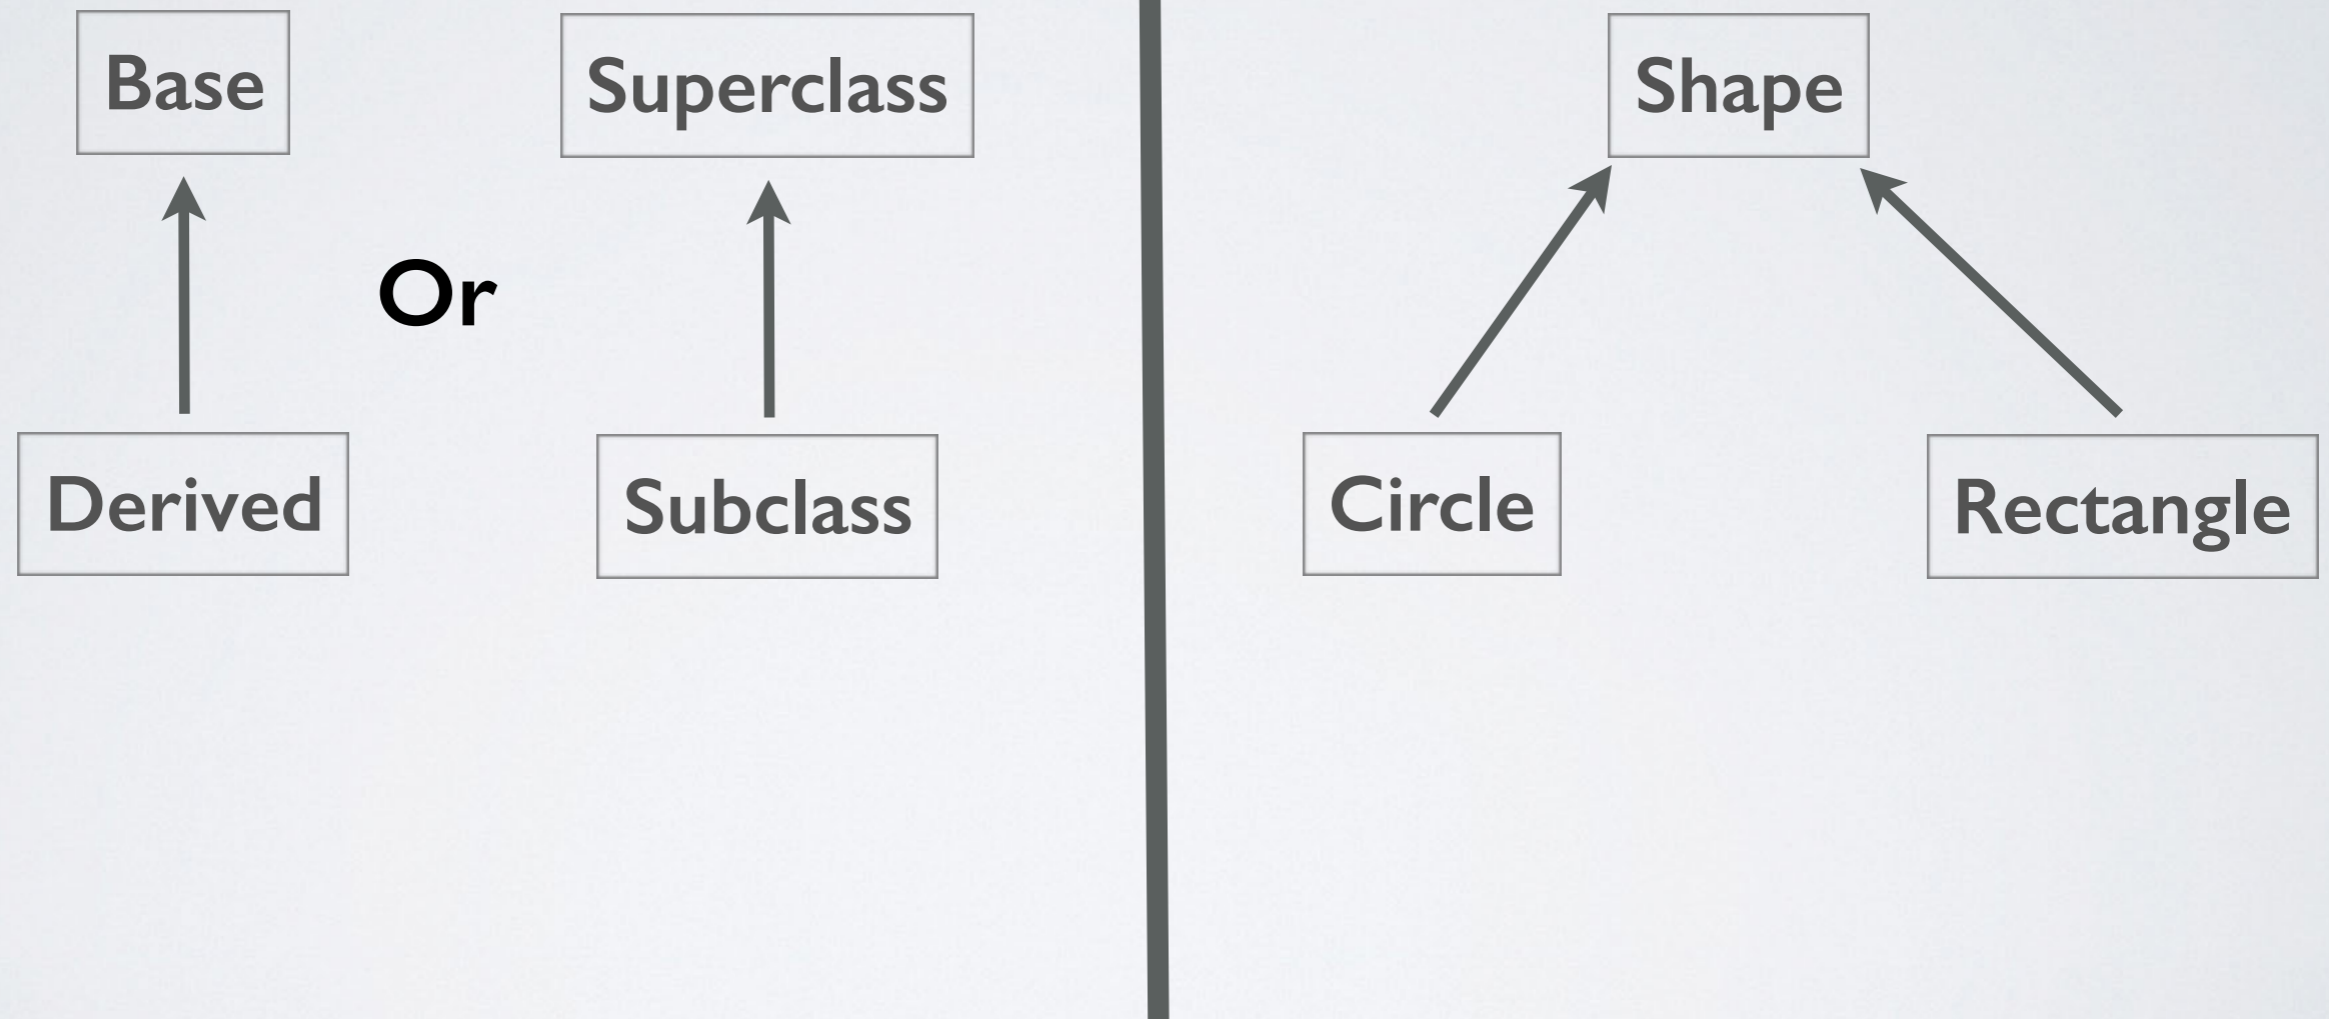


INHERITANCE

```
class Base{  
    int baseInt;  
    char baseChar;  
public:  
    Base(): baseInt(0), baseChar('0'){  
    }  
    ...  
};
```

Автоматически вызовется Base()

```
class Derived: public Base{  
    char derivedChar;  
    int derivedInt;  
public:  
    Derived(char a, int b): derivedChar(a), derivedInt(b){  
    }  
    ...  
};
```

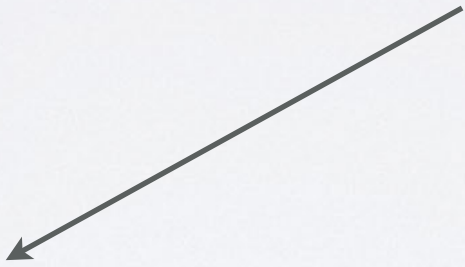


INHERITANCE

```
class Base{  
    int baseInt;  
    char baseChar;  
public:  
    Base(): baseInt(0), baseChar('0'){  
    }  
    ...  
};
```

Можно и так.

```
class Derived: public Base{  
    char derivedChar;  
    int derivedInt;  
public:  
    Derived(char a, int b): Base(), derivedChar(a), derivedInt(b){  
    }  
    ...  
};
```

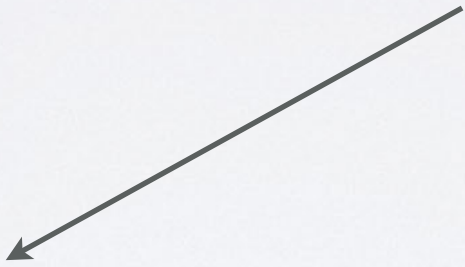


INHERITANCE

```
class Base{
    int baseInt;
    char baseChar;
public:
    Base(int baseA, char baseB): baseInt(baseA), baseChar(baseB){
    }
    ...
};
```


```
class Derived: public Base{
    char derivedChar;
    int derivedInt;
public:
    Derived(int baseA, char baseB, char a, int b)
        : Base(baseA, baseB), derivedChar(a), derivedInt(b){
    }
    ...
};
```

Обязательно вызывать в явном
ВИДЕ




CONSTRUCTION & DESTRUCTION ORDER


Diagram
classes

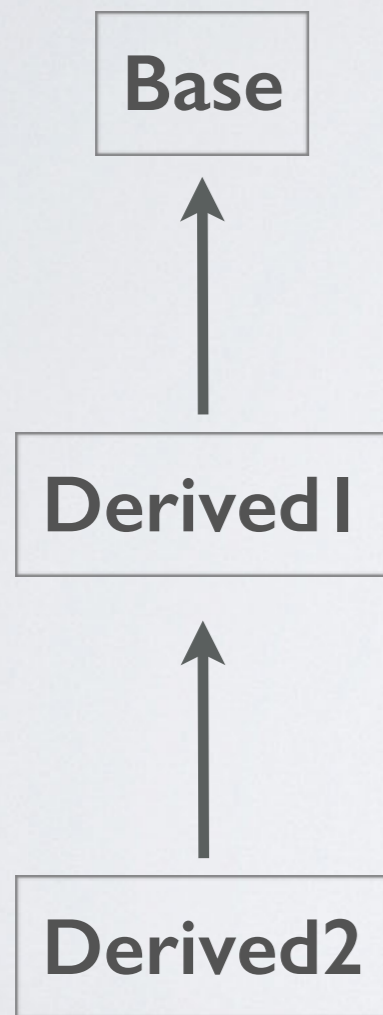

Construction of
'Derived2' class

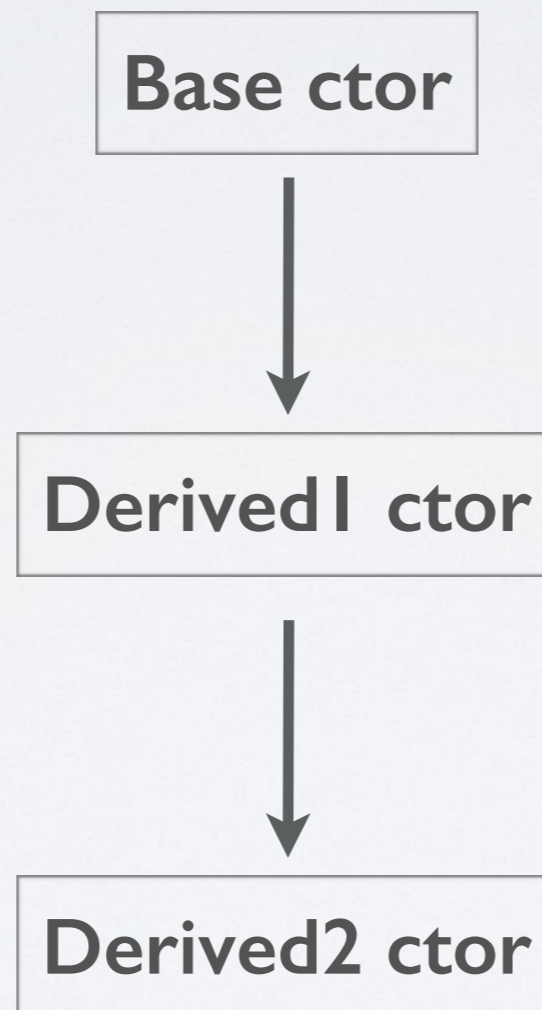


Destruction of
'Derived2' class

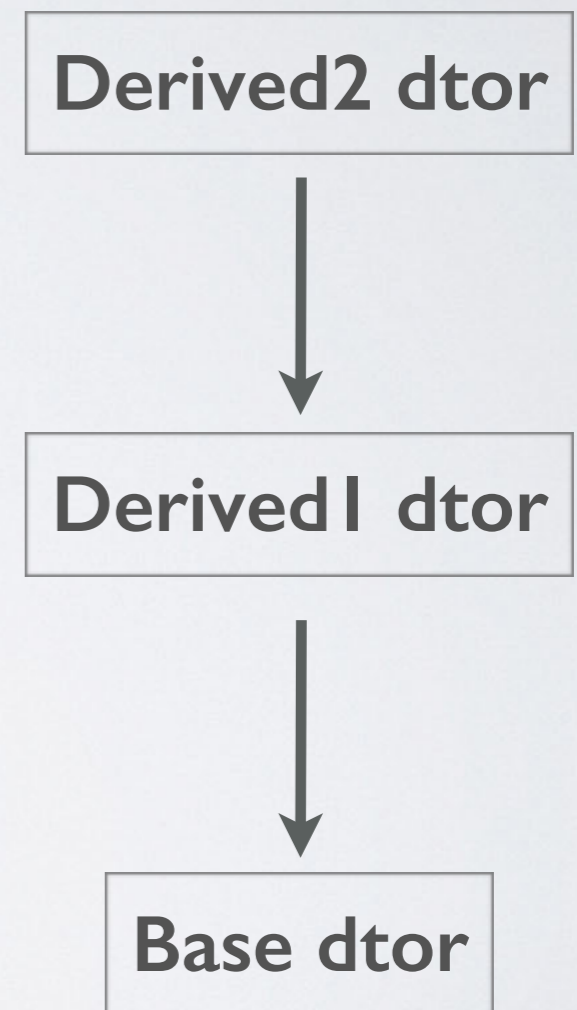

USING INHERITANCE

```
int main(){  
    Derived* derPtr = new Derived;  
  
    Base* basePtr = derPtr;  
  
    return 0;  
};
```

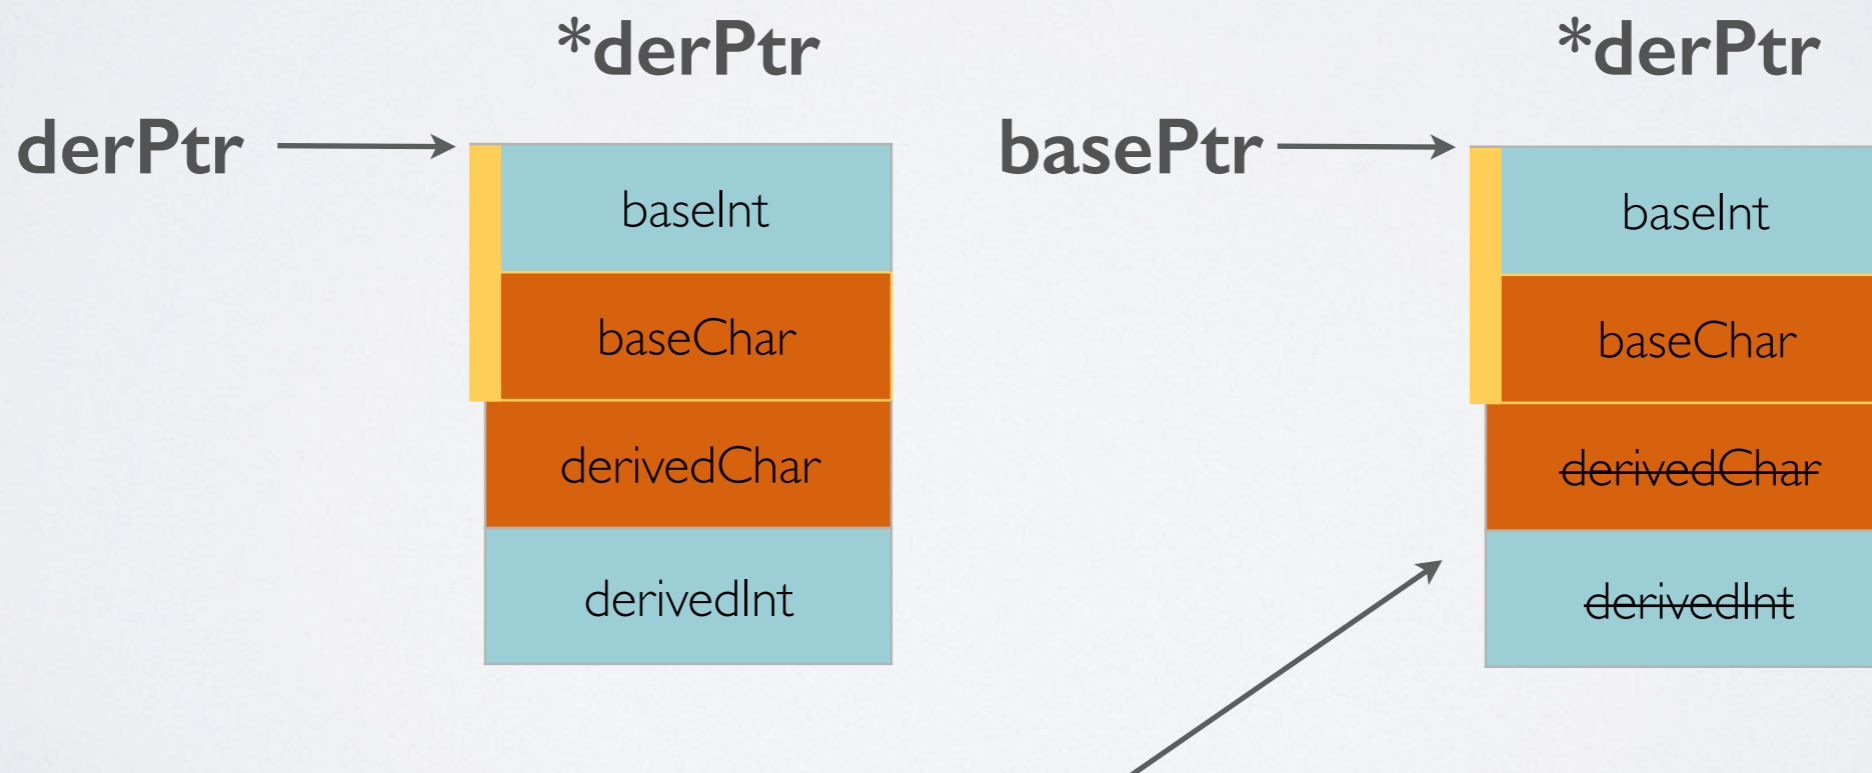


поля 'Derived' класса не доступны для basePtr

USING INHERITANCE

```
int main(){
    Derived* derPtr = new Derived;

    Base& baseRef = *derPtr;


    return 0;
};
```

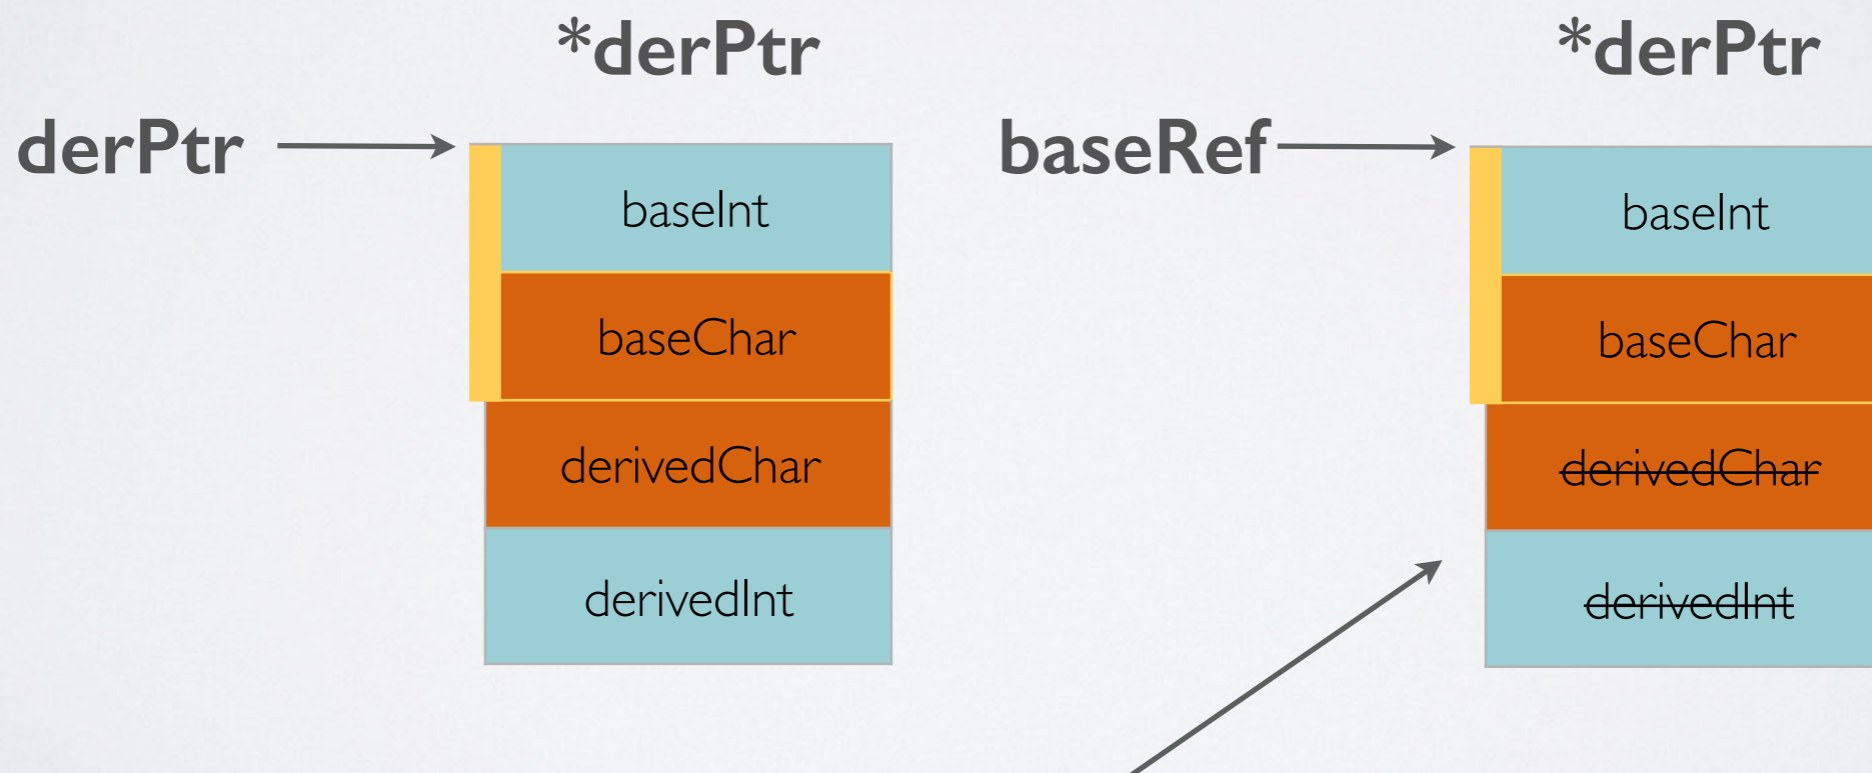

поля 'Derived' класса не доступны для baseRef

USING INHERITANCE

```
int main(){  
    Derived* derPtr = new Derived;  
  
    Base base = *derPtr; ← copying operation  
  
    return 0;  
};
```

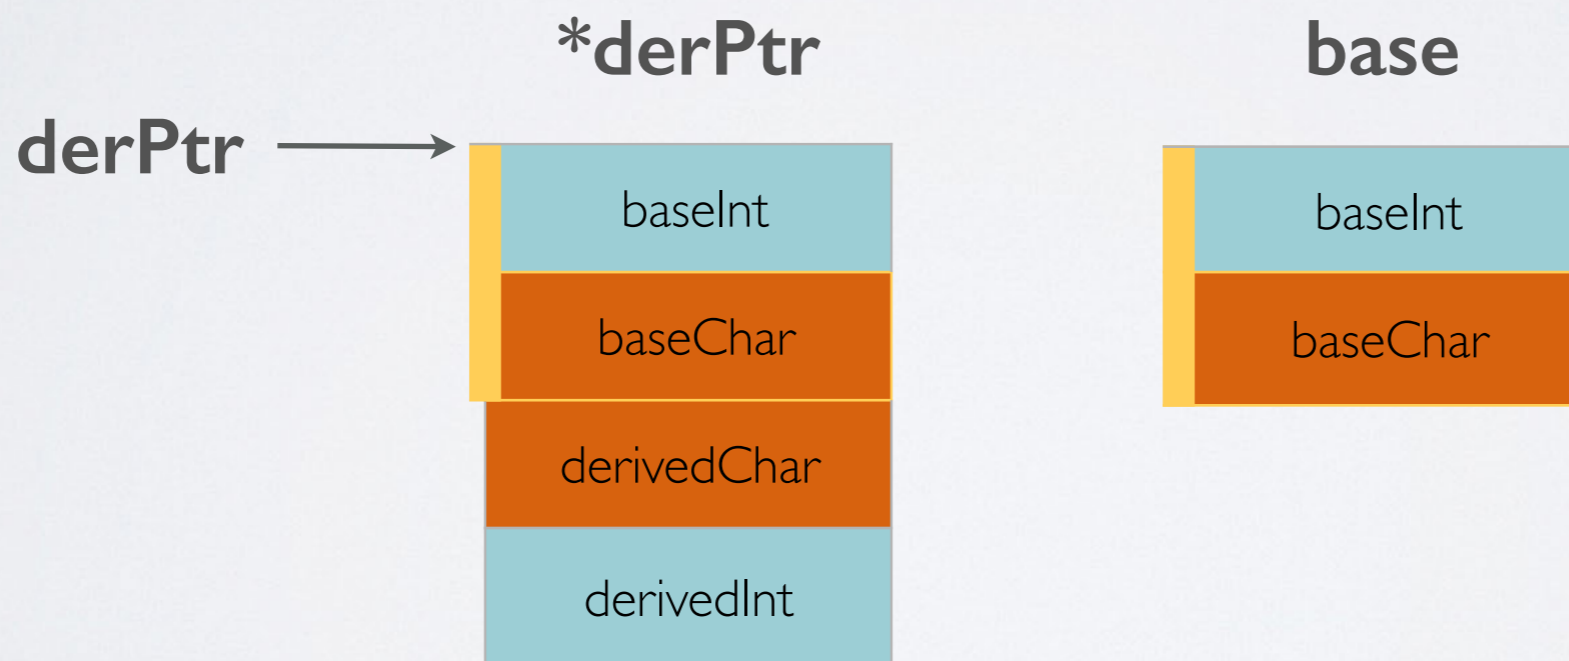

It's new object.

USING INHERITANCE


```
int main(){
    std::vector<Shape*> shapes;

    shapes.push_back(new Circle(1, 2, 2));
    shapes.push_back(new Rectangle(5, 5, 5, 5));
    shapes.push_back(new Square(10, 10, 2));

    for(int i = 0; shapes.size() > i; ++i){
        shapes[i]->draw();
        delete shapes[i];
    }

    return 0;
};
```

virtual function

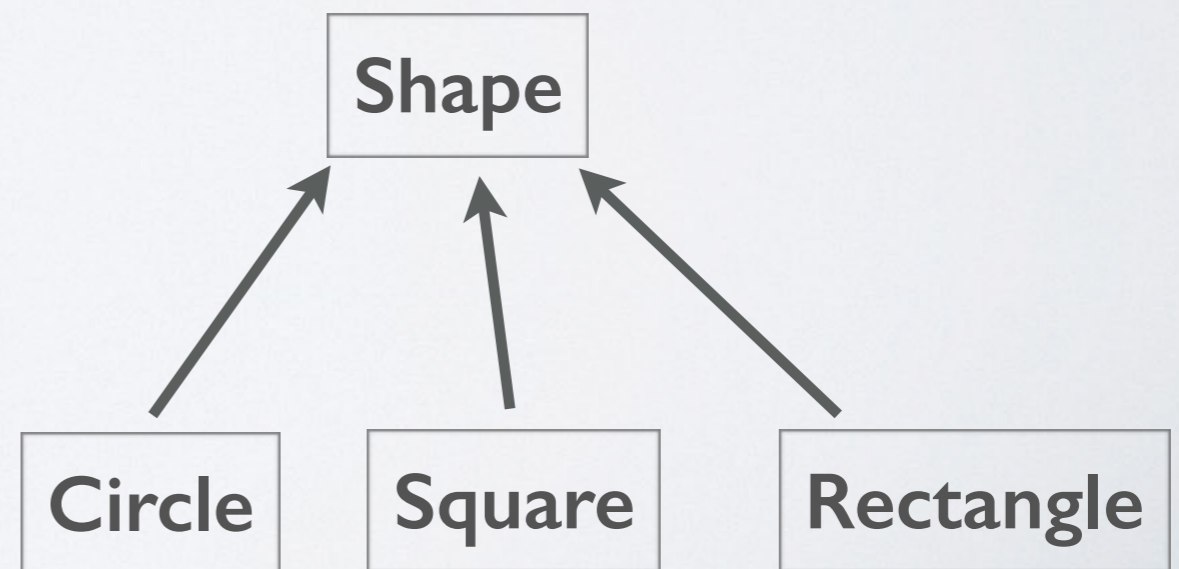



MULTIPLE INHERITANCE

```
class BaseA{  
    int fieldA;  
};
```

```
class BaseB{  
    int fieldB;  
};
```


```
class Derived : public BaseA, public BaseB{  
    int fieldD;  
};
```

Derived

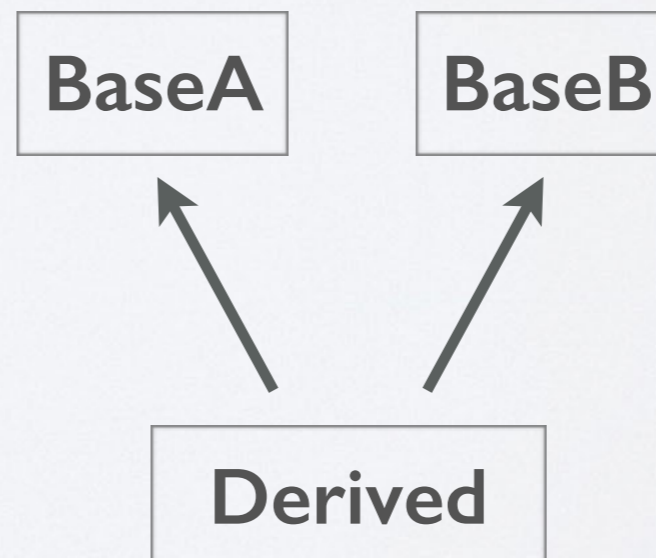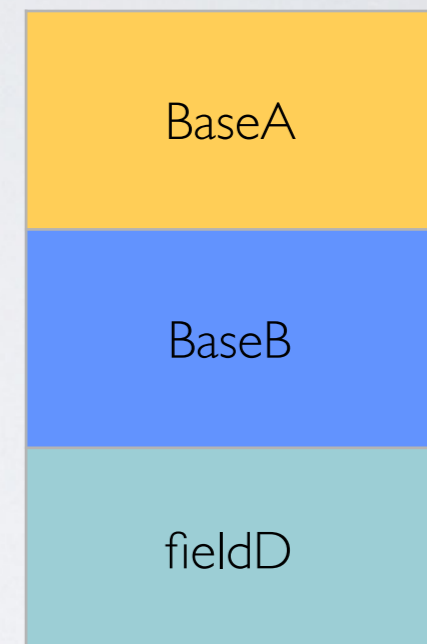


USING MULTIPLE INHERITANCE

```
int main(){  
    Derived* derPtr = new Derived;  
  
    BaseA* baseA = derPtr;  
    BaseB* baseB = derPtr;  
  
    return 0;  
};
```

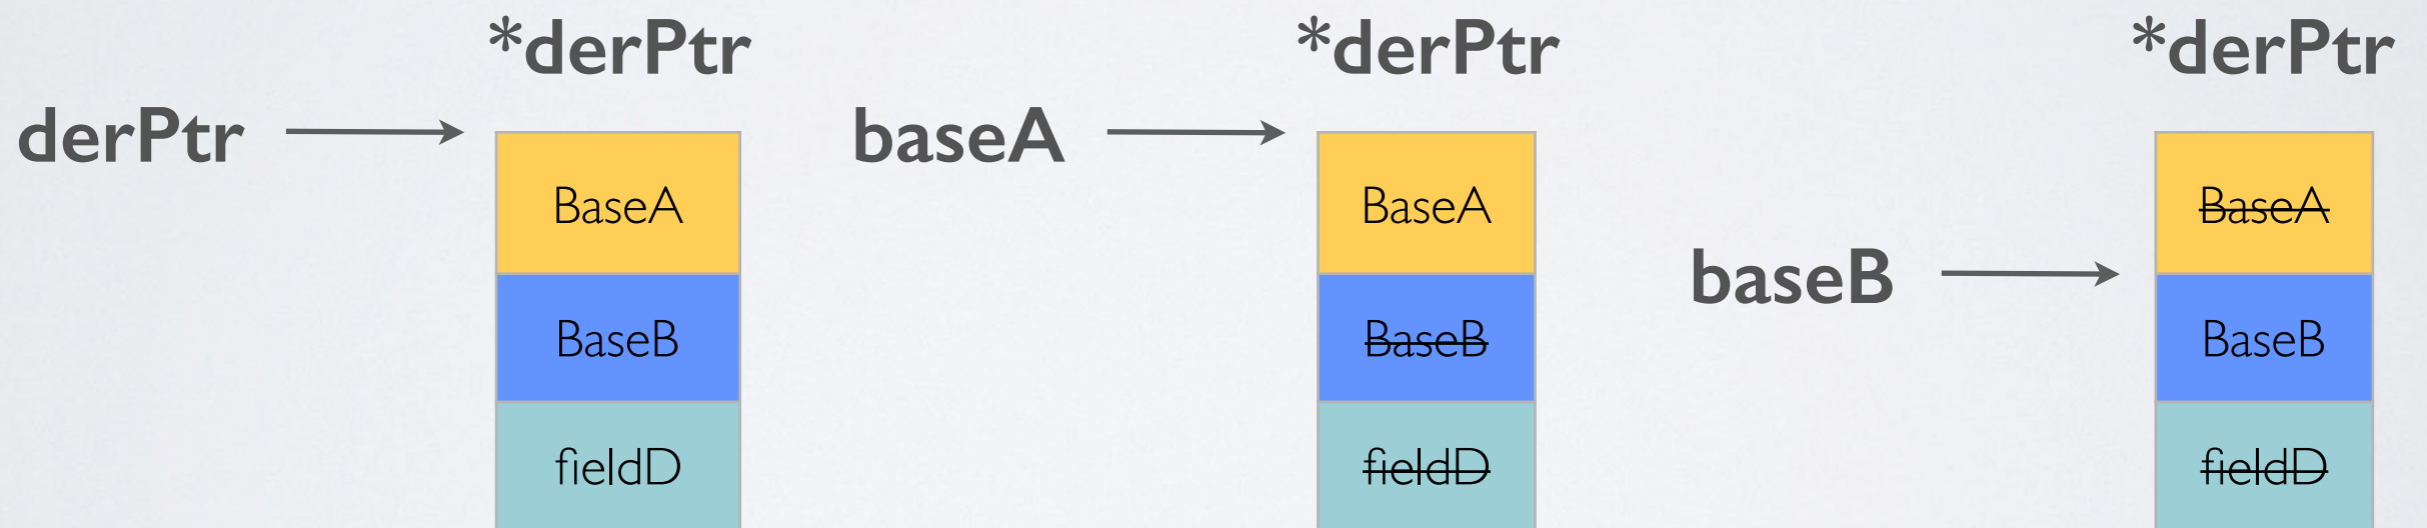


USING MULTIPLE INHERITANCE

```
int main(){  
    Derived* derPtr = new Derived;  
  
    BaseA& baseA = *derPtr;  
    BaseB& baseB = *derPtr;  
  
    return 0;  
};
```

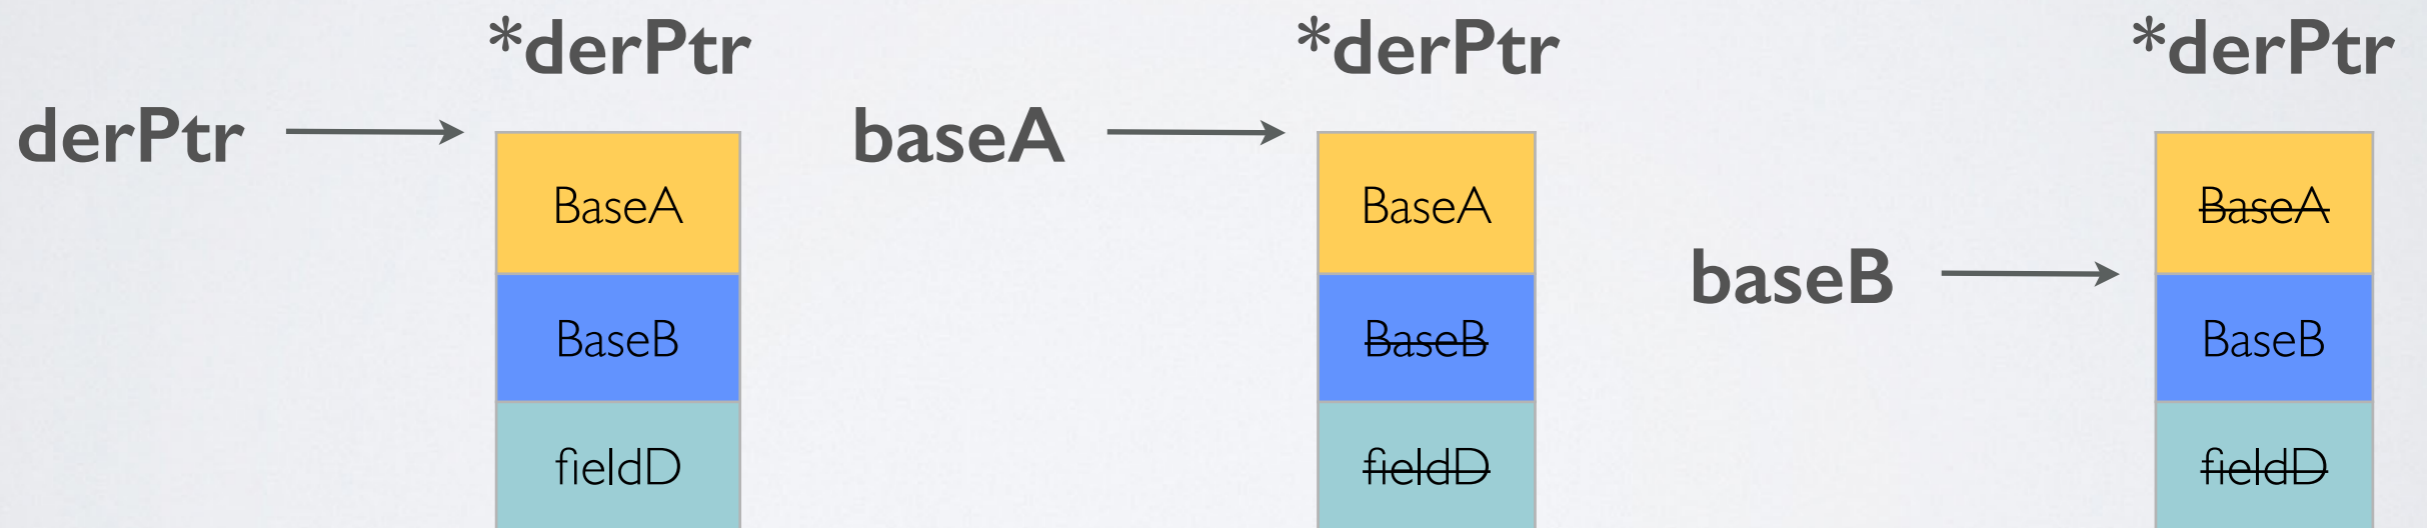

USING MULTIPLE INHERITANCE

```
int main(){  
    Derived* derPtr = new Derived;  
  
    BaseA baseA = *derPtr;  
    BaseB baseB = *derPtr;  
  
    return 0;  
};
```

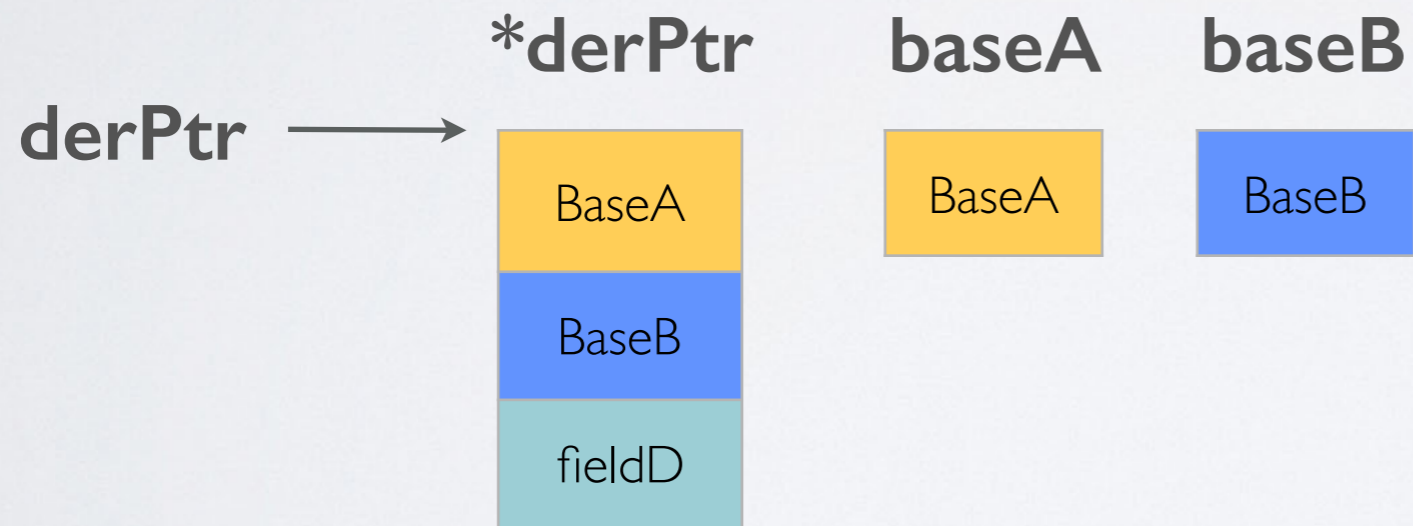


"DREADED DIAMOND"

```
class UltimateBase{
    int fieldU;
};

class BaseA : public UltimateBase{
    int fieldA;
};

class BaseB : public UltimateBase{
    int fieldB;
};

class Derived : public BaseA, public BaseB{
    int fieldD;
};
```

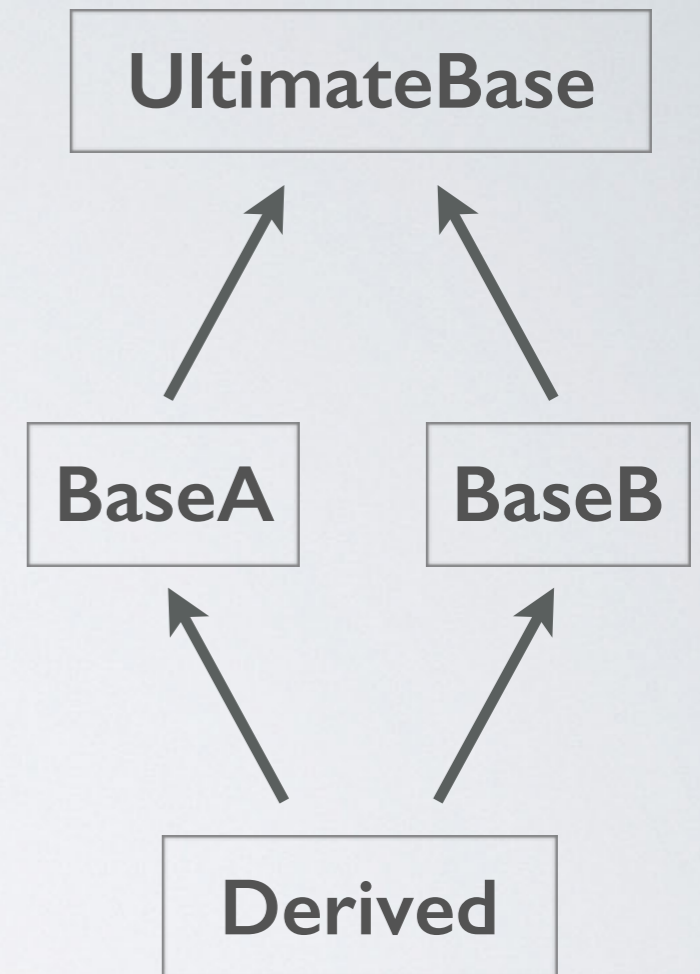


"DREADED DIAMOND"

```
class UltimateBase{
    int fieldU;
};

class BaseA : public UltimateBase{
    int fieldA;
};

class BaseB : public UltimateBase{
    int fieldB;
};

class Derived : public BaseA, public BaseB{
    int fieldD;
};
```

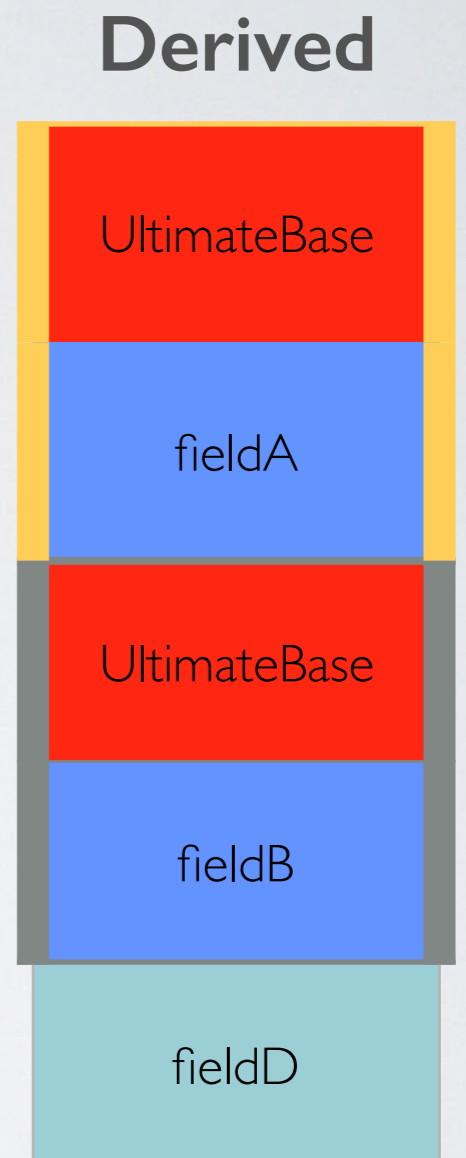


"DREADED DIAMOND"

```
int main(){  
    Derived* derPtr = new Derived;  
  
    UltimateBase* ultimateBase = derPtr;  
  
    return 0;  
};
```

ultimateBase ???

Derived

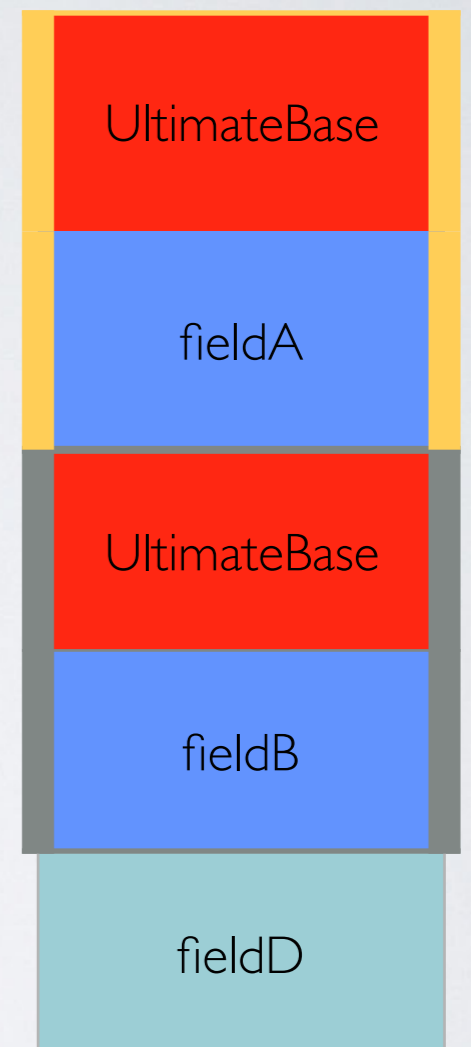


"DREADED DIAMOND"

```
int main(){  
    Derived* derPtr = new Derived;  
    BaseA* baseA = derPtr;  
    UltimateBase* ultimateBase = baseA;  
    delete derPtr;  
    return 0;  
};
```


ultimateBase



Derived

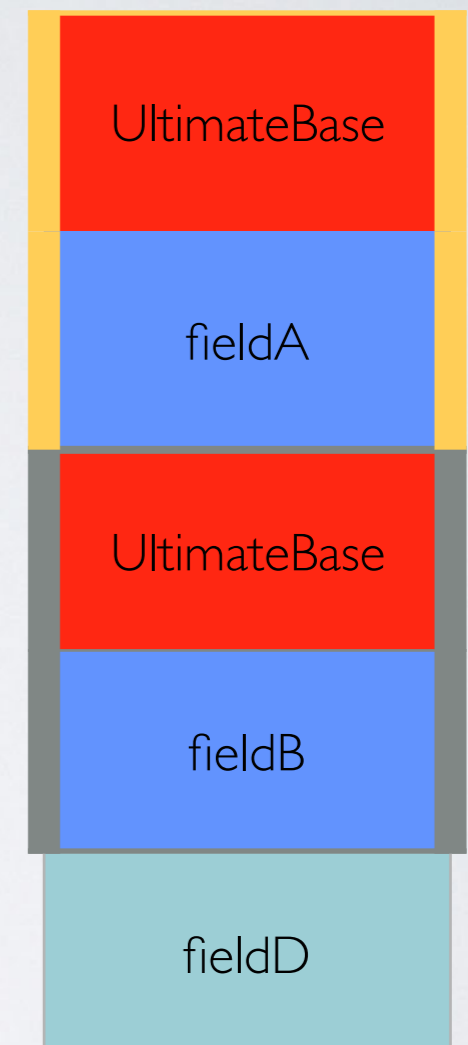

VIRTUAL INHERITANCE

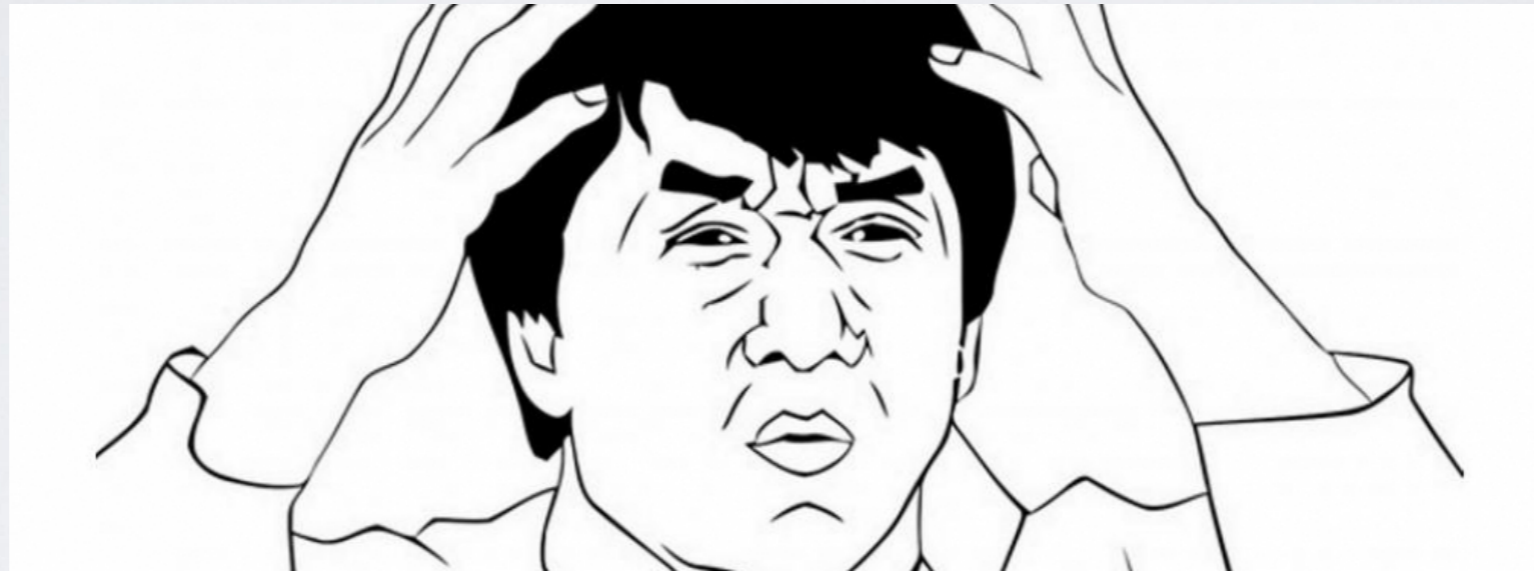


VIRTUAL INHERITANCE

```
class UltimateBase{  
    int fieldU;  
};
```

```
class BaseA : virtual public UltimateBase{  
    int fieldA;  
};
```

```
class BaseB : virtual public UltimateBase{  
    int fieldB;  
};
```

```
class Derived : public BaseA, public BaseB{  
    int fieldD;  
};
```

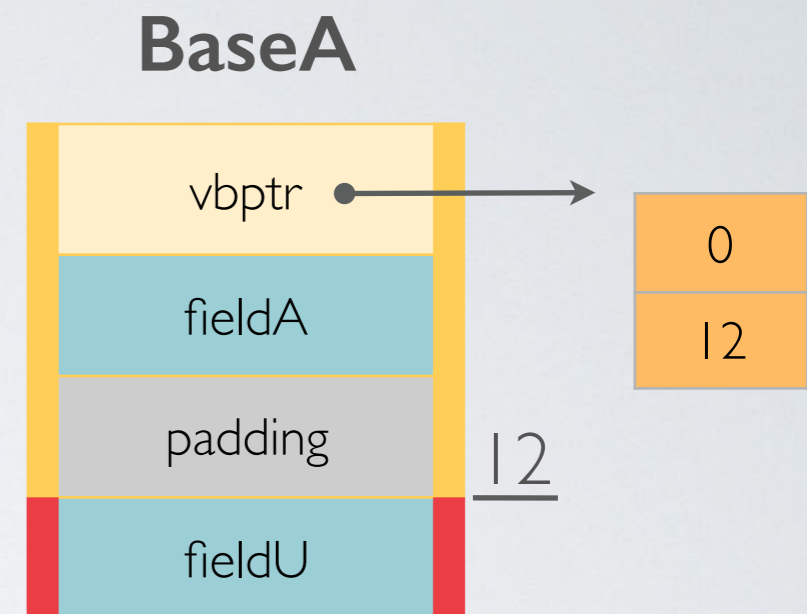

vbptr - указатель на таблицу адресования виртуальных базовых классов.

VIRTUAL INHERITANCE

vbptr

Смещение от vbptr до начала класса
Смещение от vbptr до виртуального базового класса 1
Смещение от vbptr до виртуального базового класса 2
...
Смещение от vbptr до виртуального базового класса N

MSVC compiler


VIRTUAL INHERITANCE

```
class UltimateBase{  
    int fieldU;  
};
```

```
class BaseA : virtual public UltimateBase{  
    int fieldA;  
};
```


```
class BaseB : virtual public UltimateBase{  
    int fieldB;  
};
```

```
class Derived : public BaseA, public BaseB{  
    int fieldD;  
};
```

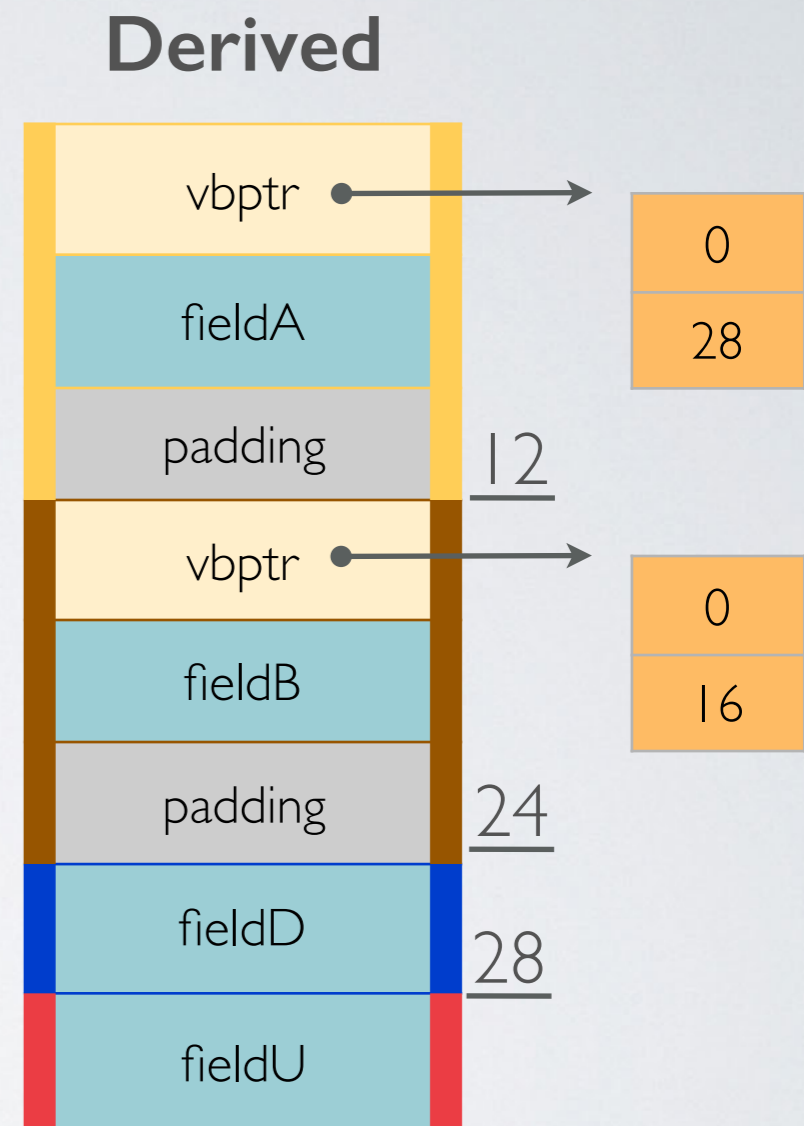

VIRTUAL INHERITANCE

```
int main(){  
    Derived* derPtr = new Derived;  
  
    UltimateBase* ultimateBase = derPtr;  
  
    return 0;  
};
```

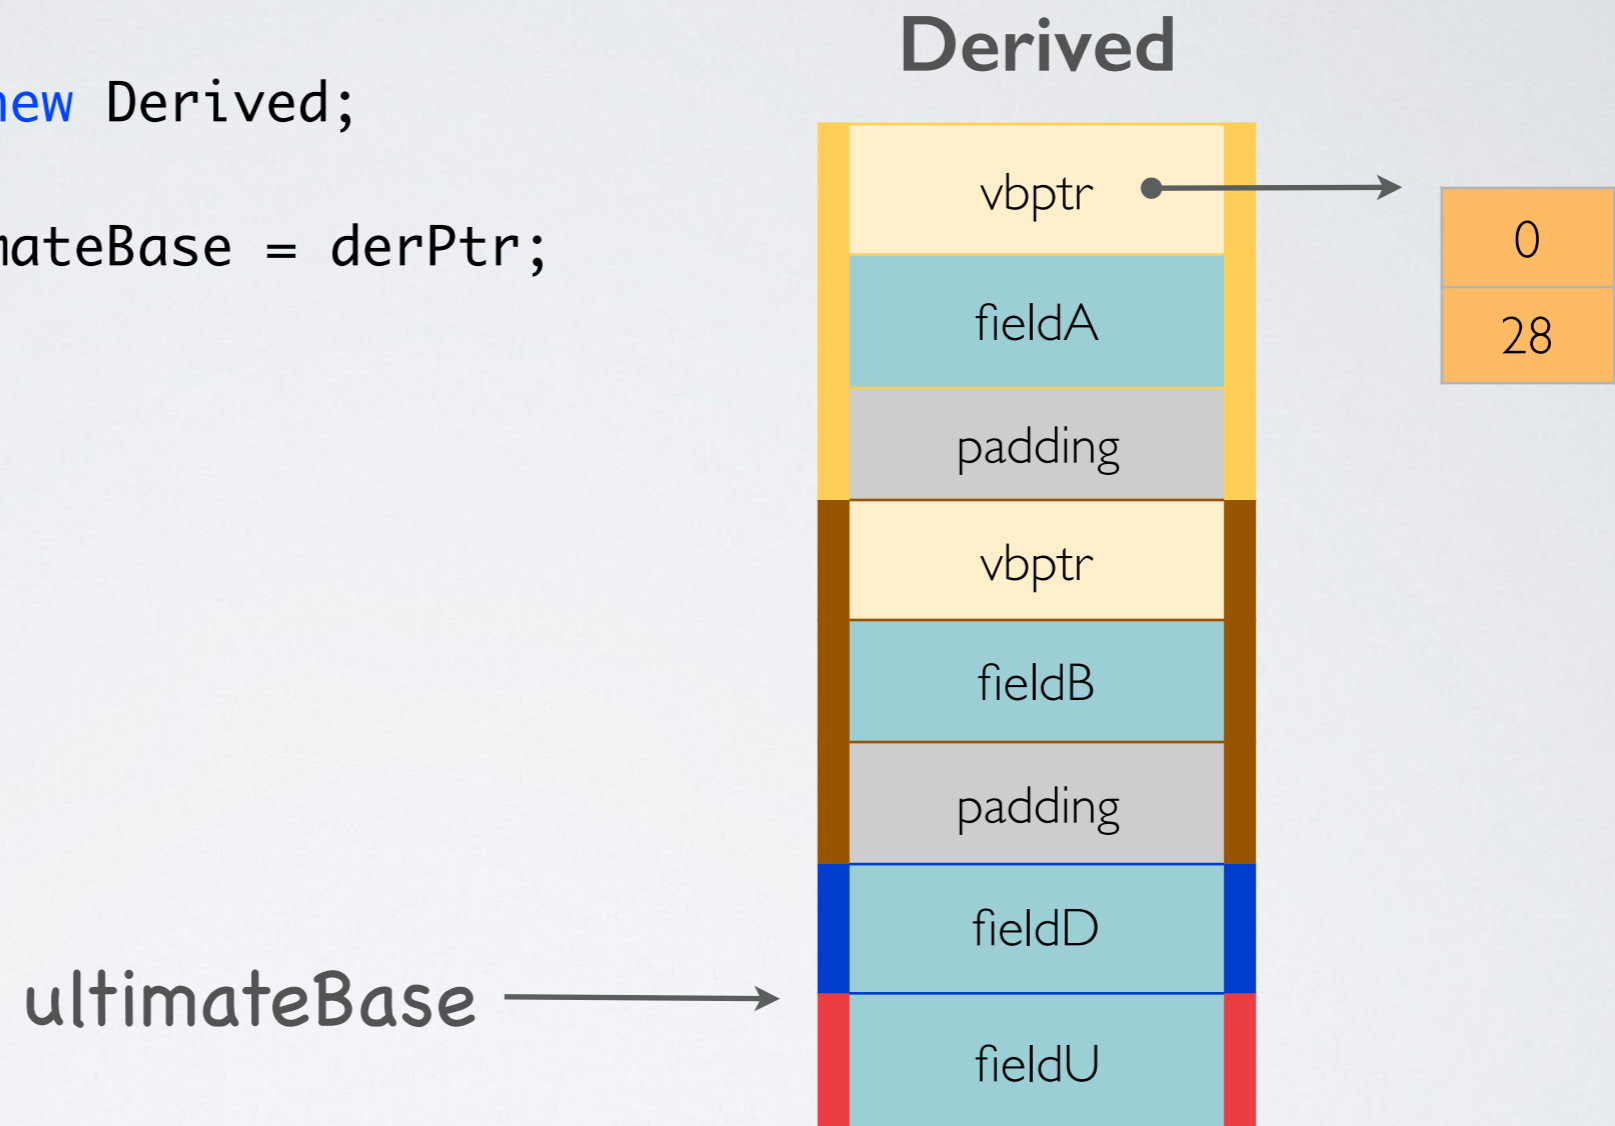

But Wait!!!---That's NOT All

VIRTUAL FUNCTIONS


```
class Shape{
    int x, y;
public:
    Shape(int x, int y);
    virtual ~Shape();

    virtual double square() const;
    virtual double perimeter() const;
    virtual double move(int x, int y);
    int getX() const;
    int getY() const;
};
```


```
class Circle: public Shape{
    int radius;
public:
    Circle(int x, int y, int radius);
    virtual ~Circle();

    virtual double square() const;
    virtual double perimeter() const;
};
```

Shape

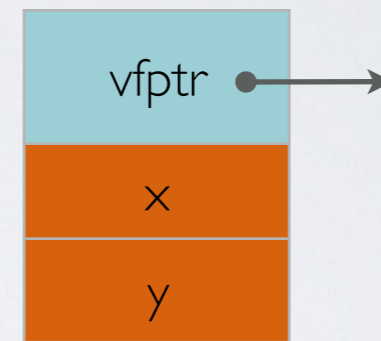

declaration order

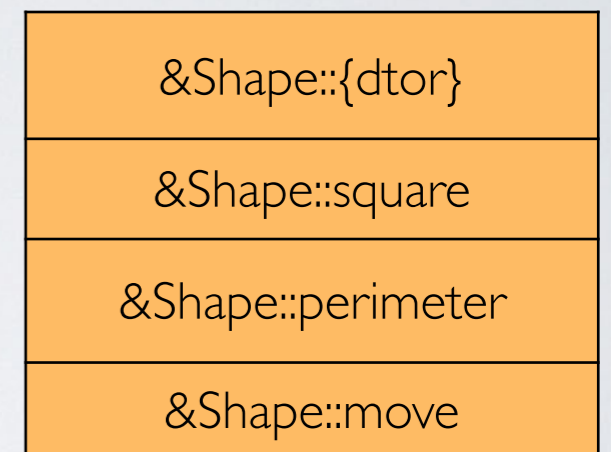

Msvc compiler

vfptr - указатель на таблицу виртуальных функций. У каждого класса своя таблица виртуальных функций.

VIRTUAL FUNCTIONS


```
class Shape{
    int x, y;
public:
    Shape(int x, int y);
    virtual ~Shape();

    virtual double square() const;
    virtual double perimeter() const;
    virtual double move(int x, int y);
    int getX() const;
    int getY() const;
};
```

```
class Circle: public Shape{
    int radius;
public:
    Circle(int x, int y, int radius);
    virtual ~Circle();

    virtual double square() const;
    virtual double perimeter() const;
};
```


Circle

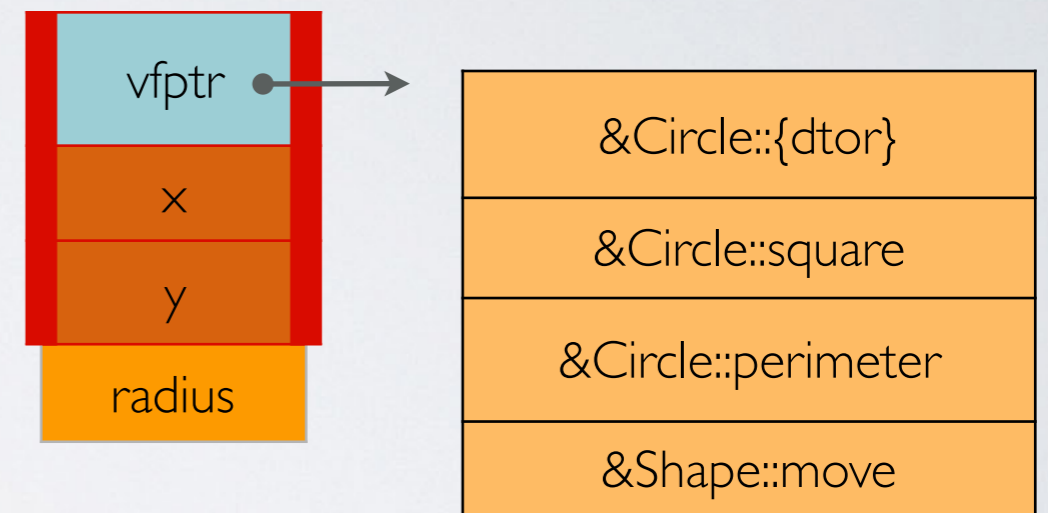

Msvc compiler

VIRTUAL FUNCTIONS

```
int main(){  
    Circle* circlePtr = new Circle(1, 1, 1);  
  
    Shape* shapePtr = circlePtr;  
    shapePtr->move(1, 2);  
    shapePtr->square();  
  
    delete shapePtr;  
  
    return 0;  
};
```

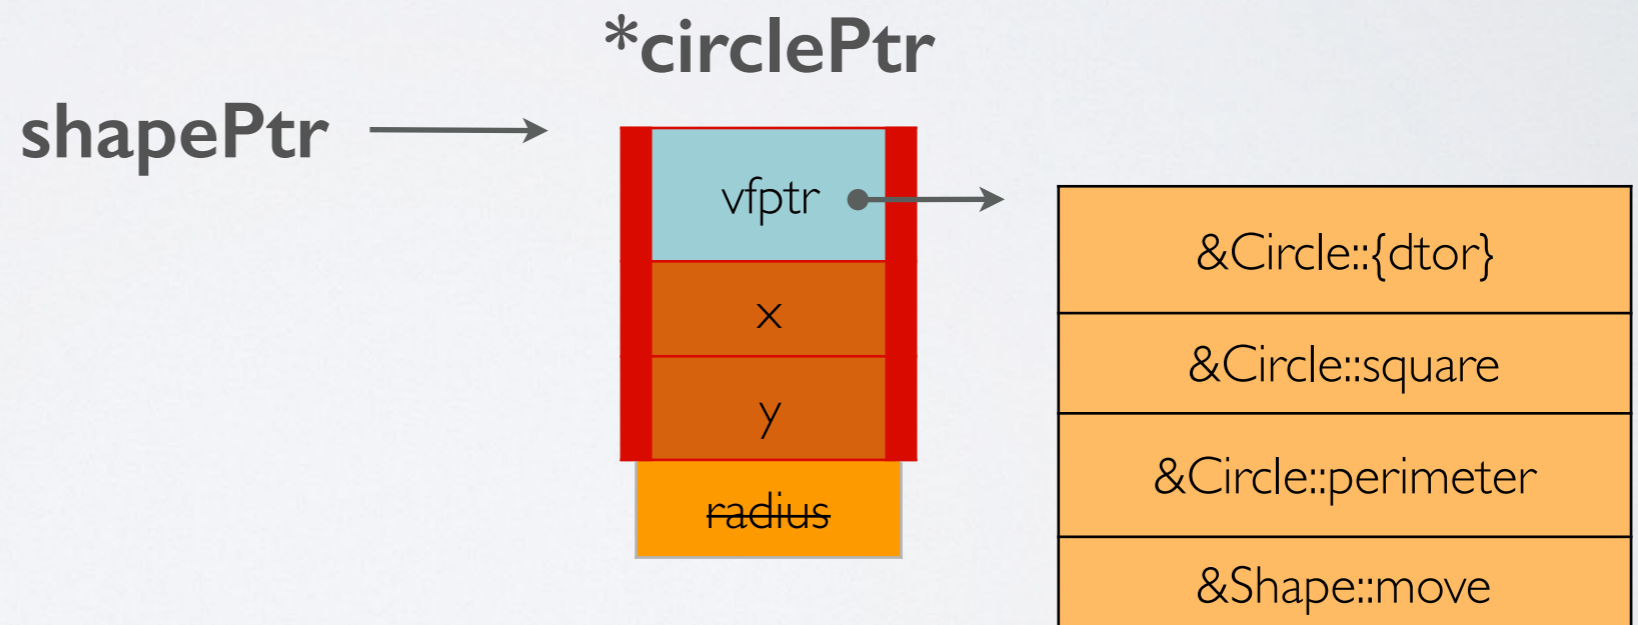

КОНЕЦ ТРЕТЬЕЙ ЛЕКЦИИ

```
virtual ~Lecture() { }
```